



# 晶森电子科技(香港)有限公司 东莞市健阳达电子有限公司

DONGGUAN CHIPSEN ELECTRONICS TECHNOLOGY CO.,LTD

## SPECIFICATION FOR APPROVAL

CUSTOMER No. :		CHIPSEN P/N:	3D数字电感系列
NAME MODEL:	3D DIGITAL INDUCTANCE	CHIPSEN MODEL No.:	
CUSTOMER P/N		ISSUE DATE:	2022/10/30
CUSTOMER REV:		CHIPSENREV:	A0

确认并回签，如未回签此份承认书，已收到该零件的订单，则视为此零件已通过贵司的认可。

Please confirm and countersign. If we receive PO without acknowledgement,

It is deemed to have been approved by your company.

CHIPSEN 厂商	APPROVED BY批准	CHECKED BY审核	DRAWN BY制作
	Xie Jingcheng	Chun MingFai	Liu Lijun

CUSTOMER 客户	(CUSTOMER OPINION) 客户意见:
-------------	--------------------------

地址: 中国·广东省·东莞市常平镇桥沥村常黄路马屋村工业区A栋1号

Address: No. 1, Building A, Mawucun Industrial Zone, Changhuang Road, Qiaoli Village, Changping Town, Dongguan City, Guangdong, China

(TEL)电话:86-769-83979690 89308858 (FAX)传真:86-769-83823890

(URL)网址: <http://www.chipsen.com.cn> E-mail邮箱: [sales@chipsen.com.cn](mailto:sales@chipsen.com.cn)



011  
ISO9001:2015



IATF-16949:2016



ISO 14001:2004



E332338



CQC13001103303







晶森电子科技(香港)有限公司  
 东莞市健阳达电子有限公司  
 DONGGUAN CHIPSEN ELECTRONICS TECHNOLOGY CO.,LTD  
 SPECICATION FOR APPROVAL

CUSTOMER No. :		CHIPSEN P/N:	3D数字电感系列
NAME MODEL:	3D DIGITAL INDUCTANCE	CHIPSEN MODEL No.:	
CUSTOMER P/N		ISSUE DATE:	2022/10/30
CUSTOMER REV:		CHIPSENREV:	A0

一. 外观尺寸与色码电感原则: **Appearance of size AND EC inductance of principles**

尺寸单位Size Unit: mm      电感单位Inductance Unit: H

● **FEATURES**

1. Compact size using flat wire, SMD type.
2. Assemblage project, sturdy construction.
3. Super high current, Low resistance.
4. Low radiation noise by magnetically shielded construction.
5. The optimal design realizes high quality sound and low distortion.

特性

具有扁平线小尺寸, 贴片类型, 超大的额定电流, 低直流电阻  
 二合一的结构缩小空间, 磁屏蔽结构的低辐射噪声。


● **APPLICATIONS**

OA equipment Digital camera, LCD television set  
 notebook PC, Audio equipment, portable communication  
 equipments, DC/DC converters, etc.


用途

录音机, OA仪器, 数码相机, 液晶电视, 笔记本型电脑  
 小型通信机器, DC/DC变压器之电源供应器等。

● **PRODUCT 产品**

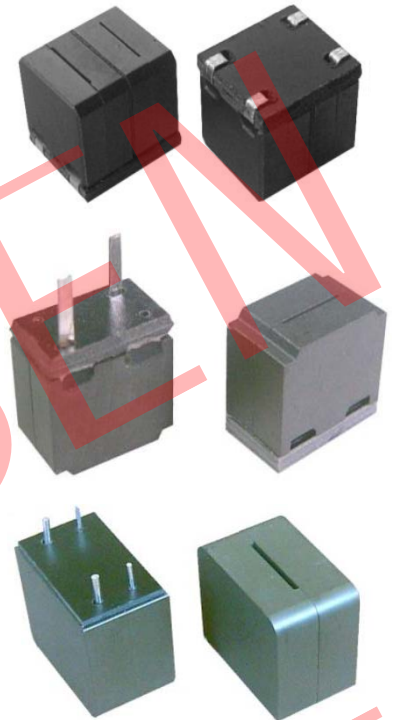

● **PART NUMBERING SYSTEM (品名系统)**

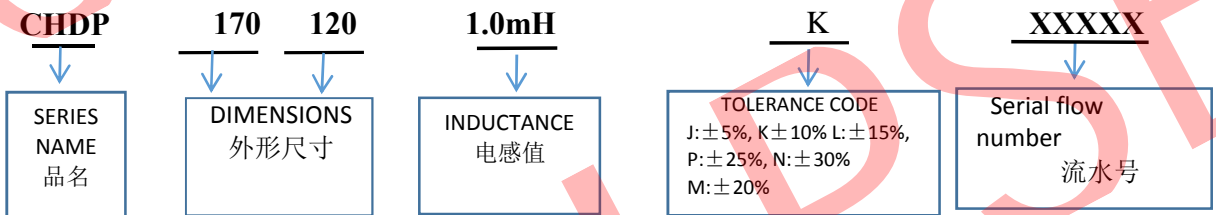

<b>APPROVED BY 批准</b>	<b>CHECKED BY 审核</b>	<b>DRAWN BY 制作</b>
Xie Jingcheng	Chun MingFai	Liu Lijun

Welcome Visit 欢迎访问: <http://www.chipsen.com.cn>




SPECIFICATION FOR APPROVAL

CUSTOMER No. :		CHIPSEN P/N:	3D数字电感系列
NAME MODEL:	3D DIGITAL INDUCTANCE	CHIPSEN MODEL No.:	
CUSTOMER P/N		ISSUE DATE:	2022/10/30
CUSTOMER REV:		CHIPSENREV:	A0

二, 各系列产品尺寸与电性参数  
 Dimensions and electrical parameters of each product series products

● SHAPES AND DIMENSIONS 外形尺寸 (Unit:mm)

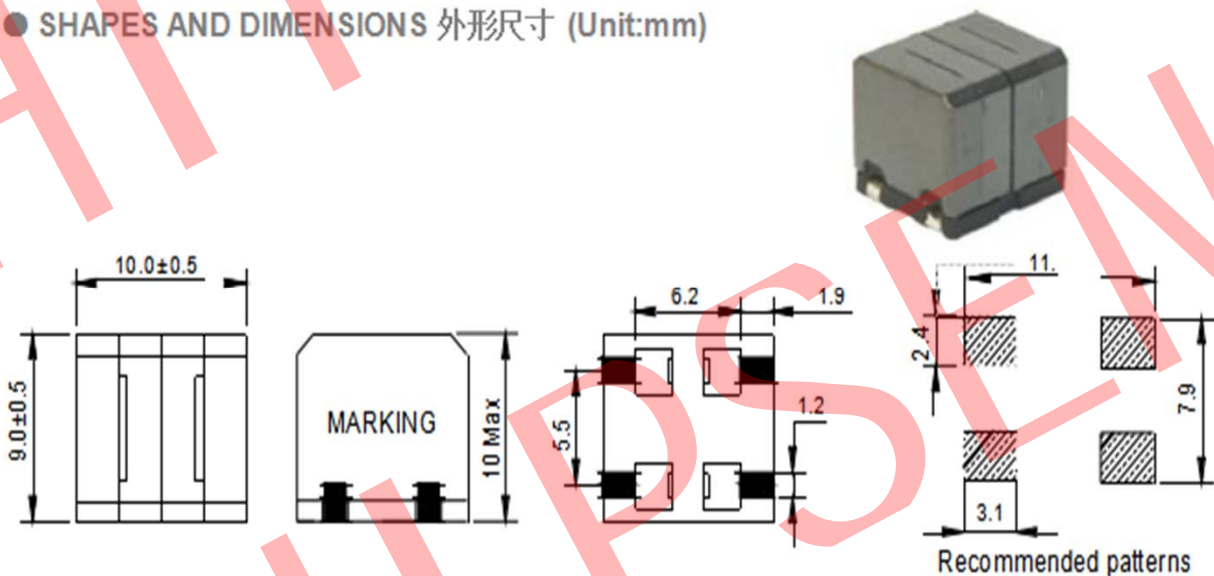

● Electrical parameters

No 序号	PART NUMBER 品名	INDUCTANCE (μ H) 电感值 @	DCR (Max) Ω 直流电阻	(m)	Isat (Max.) (A) 饱和电流	Irms (Max.) (A) 额定电流
1	CHDP1010-3.3uH-M	3.3±20%	19.0		18.0	5.0
2	CHDP1010-4.7uH-M	4.7±20%	19.0		11.0	5.0
3	CHDP1010-6.8uH-M	6.8±20%	19.0		9.7	5.0
4	CHDP1010-8.2uH-M	8.2±20%	19.0		6.8	5.0
5	CHDP1010-10uH-M	10±20%	19.0		5.6	5.0
6	CHDP1010-12uH-M	12±20%	22.0		5.0	4.8
7	CHDP1010-15uH-M	15±20%	36.0		4.6	3.5
8	CHDP1010-22uH-M	22±20%	36.0		3.0	3.5

NOTE  
 1.Isat: DC current at which the inductance drops approximate 30% from its value without current;  
 2.Irms: DC current that causes the temperature rise ( $\Delta T = 40^\circ C$ ) from  $25^\circ C$  ambient.

APPROVED BY 批准	CHECKED BY 审核	DRAWN BY 制作
Xie Jingcheng	Chun MingFai	Liu Lijun




SPECIFICATION FOR APPROVAL

CUSTOMER No. :		CHIPSEN P/N:	3D数字电感系列
NAME MODEL:	3D DIGITAL INDUCTANCE	CHIPSEN MODEL No.:	
CUSTOMER P/N		ISSUE DATE:	2022/10/30
CUSTOMER REV:		CHIPSENREV:	A0

二, 各系列产品尺寸与电性参数  
 Dimensions and electrical parameters of each product series products

● SHAPES AND DIMENSIONS 外形尺寸 (Unit:mm)

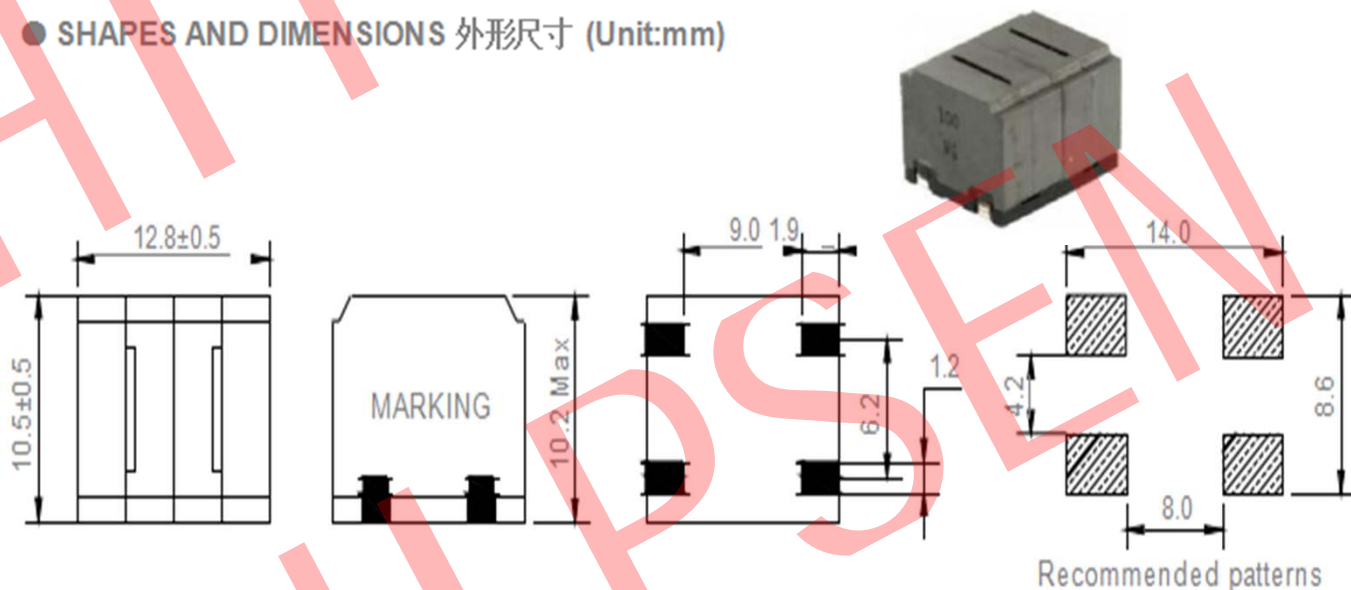

● Electrical parameters

No 序号	PART NUMBER 品名	INDUCTANCE (μ H) 电感值 @	DCR (Max) Ω 直流电阻	(m)	Isat (Max.) (A) 饱和电流	Irms (Max.) (A) 额定电流
1	CHDP1013-3.3uH-M	3.3±20%	11		12	5.1
2	CHDP1013-8.2uH-M	8.2±20%	7.5		7.5	4.4
3	CHDP1013-10uH-M	10±20%	7.1		7.1	4.2
4	CHDP1013-12uH-M	12±20%	6		6	4
5	CHDP1013-15uH-M	15±20%	5.3		5.3	3.8
6	CHDP1013-18uH-M	18±20%	4.6		4.6	3.8
7	CHDP1013-22uH-M	22±20%	4.3		4.3	3.0

NOTE 1. Isat: DC current at which the inductance drops approximate 30% from its value without current;  
 2. Irms: DC current that causes the temperature rise ( $\Delta T = 40^\circ C$ ) from  $25^\circ C$  ambient.

APPROVED BY 批准	CHECKED BY 审核	DRAWN BY 制作
Xie Jingcheng	Chun MingFai	Liu Lijun

Welcome Visit 欢迎访问: <http://www.chipsen.com.cn>






SPECIFICATION FOR APPROVAL

CUSTOMER No. :		CHIPSEN P/N:	3D数字电感系列
NAME MODEL:	3D DIGITAL INDUCTANCE	CHIPSEN MODEL No.:	
CUSTOMER P/N		ISSUE DATE:	2022/10/30
CUSTOMER REV:		CHIPSENREV:	A0

二, 各系列产品尺寸与电性参数

Dimensions and electrical parameters of each product series products

● SHAPES AND DIMENSIONS 外形尺寸 (Unit:mm)

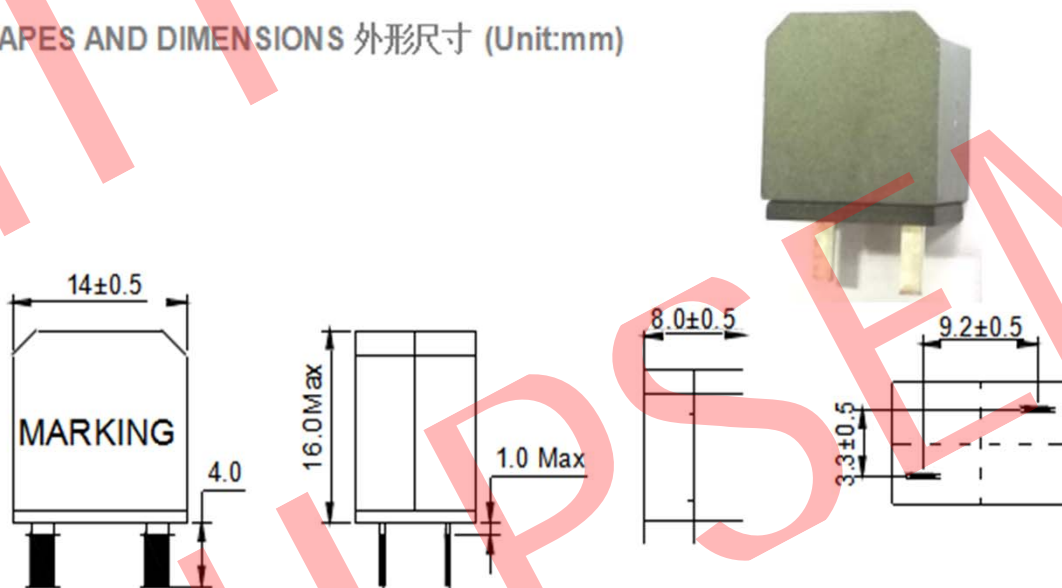

● Electrical parameters

No 序号	PART NUMBER 品名	INDUCTANCE ( $\mu$ H) 电感值 @	DCR (Max) $\Omega$ 直流电阻	(m)	Isat (Max.) (A) 饱和电流	Irms (Max.) (A) 额定电流
1	CHDP1408F-6.8uH-M	3.3±20%	11.0		21.0	8.5
2	CHDP1408F-8.2uH-M	8.2±20%	11.0		18.0	8.5
3	CHDP1408F-10uH-M	10±20%	11.0		14.2	8.5
4	CHDP1408F-12uH-M	12±20%	12.0		12.0	8.0
5	CHDP1408F-15uH-M	15±20%	12.0		9.5	8.0
6	CHDP1408F-22uH-M	18±20%	12.0		6.8	8.0

NOTE 1.Isat: DC current at which the inductance drops approximate 30% from its value without current;  
2.Irms: DC current that causes the temperature rise ( $\Delta T = 40^\circ C$ ) from  $25^\circ C$  ambient.

APPROVED BY 批准	CHECKED BY 审核	DRAWN BY 制作
Xie Jingcheng	Chun MingFai	Liu Lijun

Welcome Visit 欢迎访问: <http://www.chipsen.com.cn>




SPECIFICATION FOR APPROVAL

CUSTOMER No. :		CHIPSEN P/N:	3D数字电感系列
NAME MODEL:	3D DIGITAL INDUCTANCE	CHIPSEN MODEL No.:	
CUSTOMER P/N		ISSUE DATE:	2022/10/30
CUSTOMER REV:		CHIPSENREV:	A0

二, 各系列产品尺寸与电性参数  
 Dimensions and electrical parameters of each product series products

● SHAPES AND DIMENSIONS 外形尺寸 (Unit:mm)

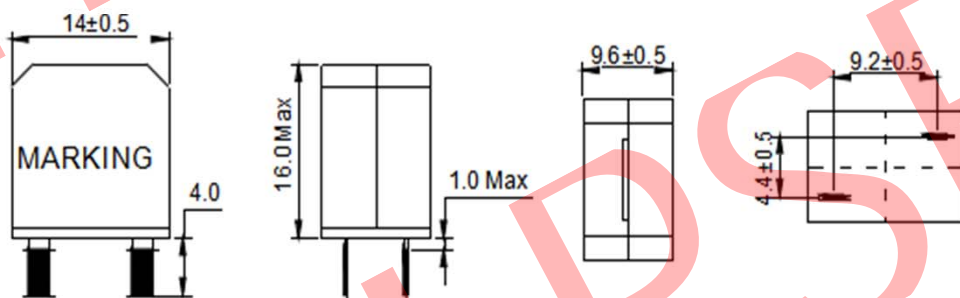

● Electrical parameters

No 序号	PART NUMBER 品名	INDUCTANCE ( $\mu$ H) 电感值 @	DCR (Max) $\Omega$ 直流电阻	(m)	Isat (Max.) (A) 饱和电流	Irms (Max.) (A) 额定电流
1	CHDP1495F-4.7uH-M	4.7±20%	6.0		21.0	14.0
2	CHDP1495F-6.8uH-M	6.8±20%	6.5		17.0	12.0
3	CHDP1495F-8.2uH-M	8.2±20%	7.5		16.0	11.0
4	CHDP1495F-10uH-M	10±20%	8.5		15.0	10.0
5	CHDP1495F12uH-M	12±20%	8.5		11.5	10.0
6	CHDP1495F-15uH-M	15±20%	8.5		9.5	10.0
7	CHDP1495F-22uH-M	22±20%	15.5		9.0	7.0
8	CHDP1495F-33uH-M	33±20%	15.5		6.2	7.0

NOTE 1. Isat: DC current at which the inductance drops approximate 30% from its value without current;  
 2. Irms: DC current that causes the temperature rise ( $\Delta T = 40^\circ C$ ) from  $25^\circ C$  ambient.

APPROVED BY 批准	CHECKED BY 审核	DRAWN BY 制作
Xie Jingcheng	Chun MingFai	Liu Lijun




SPECIFICATION FOR APPROVAL

CUSTOMER No. :		CHIPSEN P/N:	3D数字电感系列
NAME MODEL:	3D DIGITAL INDUCTANCE	CHIPSEN MODEL No.:	
CUSTOMER P/N		ISSUE DATE:	2022/10/30
CUSTOMER REV:		CHIPSENREV:	A0

二, 各系列产品尺寸与电性参数

Dimensions and electrical parameters of each product series products

● SHAPES AND DIMENSIONS 外形尺寸 (Unit:mm)

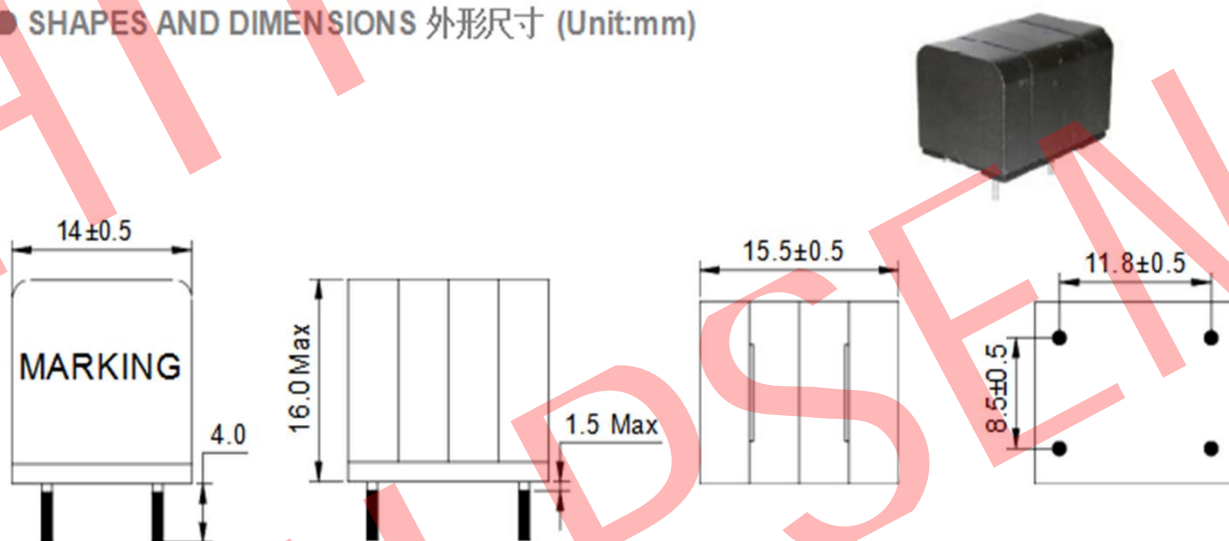

● Electrical parameters

No 序号	PART NUMBER 品名	INDUCTANCE (μ H) 电感值 @	DCR (Max) Ω 直流电阻	(m)	Isat (Max.) (A) 饱和电流	Irms (Max.) (A) 额定电流
1	CHDP1415-6.0uH-M	6.0±20%	8.2		17.0	11.0
2	CHDP1415-7.5uH-M	7.5±20%	9.3		16.0	9.0
3	CHDP1415-10uH-M	10±20%	13.5		13.0	8.0
4	CHDP1415-15uH-M	15±20%	18.0		11.0	6.8
5	CHDP1415-18uH-M	18±20%	18.0		9.7	6.8
6	CHDP1415-22uH-M	22±20%	18.0		8.3	6.8

NOTE 1.Isat: DC current at which the inductance drops approximate 30% from its value without current;  
 2.Irms: DC current that causes the temperature rise ( $\Delta T = 40^\circ C$ ) from  $25^\circ C$  ambient.

APPROVED BY 批准

CHECKED BY 审核

DRAWN BY 制作

Xie Jingcheng

Chun MingFai

Liu Lijun

Welcome Visit 欢迎访问: <http://www.chipsen.com.cn>





晶森电子科技(香港)有限公司  
东莞市健阳达电子有限公司

DONGGUAN CHIPSEN ELECTRONICS TECHNOLOGY CO.,LTD


SPECIFICATION FOR APPROVAL

CUSTOMER No. :		CHIPSEN P/N:	3D数字电感系列
NAME MODEL:	3D DIGITAL INDUCTANCE	CHIPSEN MODEL No.:	
CUSTOMER P/N		ISSUE DATE:	2022/10/30
CUSTOMER REV:		CHIPSENREV:	A0

二, 各系列产品尺寸与电性参数

Dimensions and electrical parameters of each product series products

● SHAPES AND DIMENSIONS 外形尺寸 (Unit:mm)

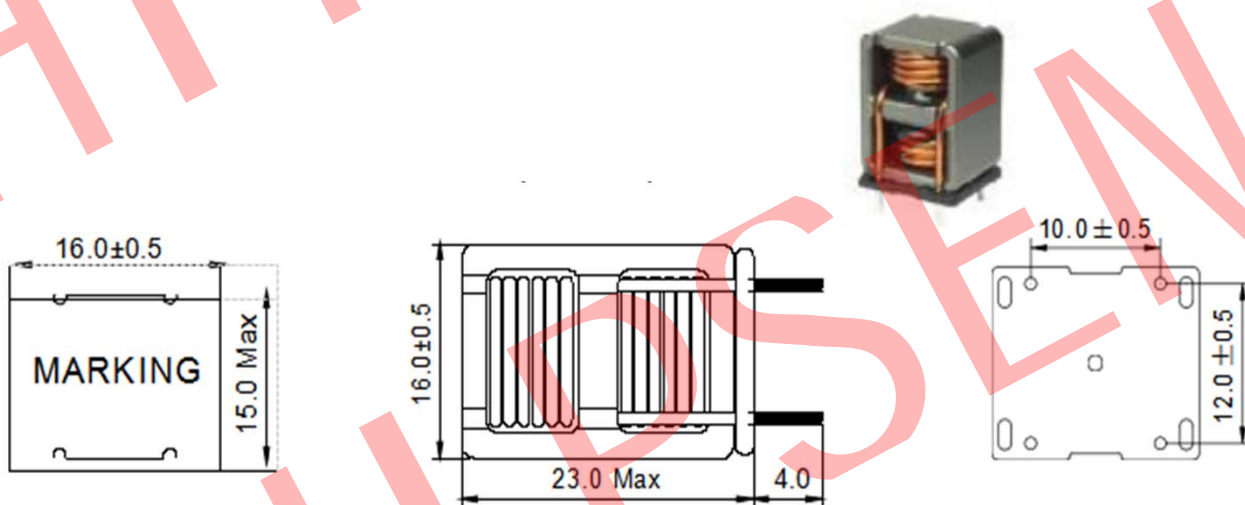

● Electrical parameters

No 序号	PART NUMBER 品名	INDUCTANCE ( $\mu$ H) 电感值 @	DCR (Max) $\Omega$ 直流电阻	(m)	Isat (Max.) (A) 饱和电流	Irms (Max.) (A) 额定电流
1	CHDP1615-10uH-M	10±20%	12.0		15.0	6.4
2	CHDP1615-15uH-M	15±20%	22.6		11.0	5.2
3	CHDP1615-22uH-M	22±20%	31.0		10.0	3.8

NOTE 1.Isat: DC current at which the inductance drops approximate 30% from its value without current;  
2.Irms: DC current that causes the temperature rise ( $\Delta T = 40^\circ C$ ) from  $25^\circ C$  ambient.

APPROVED BY 批准	CHECKED BY 审核	DRAWN BY 制作
Xie Jingcheng	Chun MingFai	Liu Lijun

Welcome Visit 欢迎访问: <http://www.chipsen.com.cn>




SPECIFICATION FOR APPROVAL

CUSTOMER No. :		CHIPSEN P/N:	3D数字电感系列
NAME MODEL:	3D DIGITAL INDUCTANCE	CHIPSEN MODEL No.:	
CUSTOMER P/N		ISSUE DATE:	2022/10/30
CUSTOMER REV:		CHIPSENREV:	A0

二, 各系列产品尺寸与电性参数  
 Dimensions and electrical parameters of each product series products

● SHAPES AND DIMENSIONS 外形尺寸 (Unit:mm)

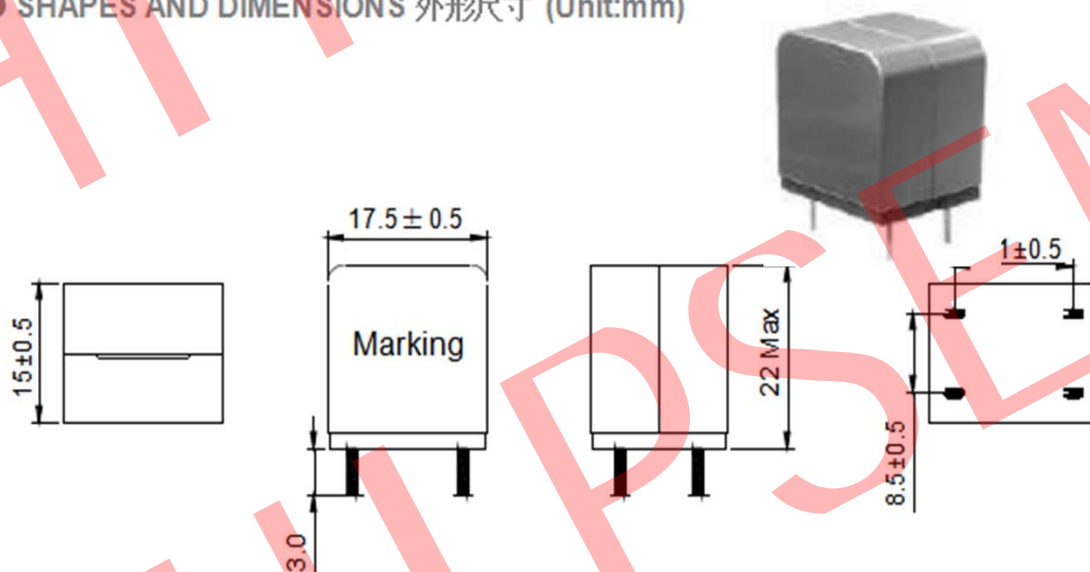

● Electrical parameters

No 序号	PART NUMBER 品名	INDUCTANCE (μ H) 电感值 @	DCR (Max) Ω 直流电阻	(m)	Isat (Max.) (A) 饱和电流	Irms (Max.) (A) 额定电流
1	CHDP1715-10uH-M	10±20%	16.0		30.0	8.2
2	CHDP1715-12uH-M	12±20%	16.0		25.0	8.2
3	CHDP1715-15uH-M	15±20%	16.0		18.0	8.2
4	CHDP1715-18uH-M	18±20%	16.0		16.0	8.2
5	CHDP1715-22uH-M	22±20%	16.0		11.0	8.2
6	CHDP1715-33uH-M	33±20%	16.0		8.0	8.2

NOTE 1. Isat: DC current at which the inductance drops approximate 30% from its value without current;  
 2. Irms: DC current that causes the temperature rise ( $\Delta T = 40^\circ C$ ) from  $25^\circ C$  ambient.

APPROVED BY 批准	CHECKED BY 审核	DRAWN BY 制作
Xie Jingcheng	Chun MingFai	Liu Lijun

Welcome Visit 欢迎访问: <http://www.chipsen.com.cn>




SPECIFICATION FOR APPROVAL

CUSTOMER No. :		CHIPSEN P/N:	3D数字电感系列
NAME MODEL:	3D DIGITAL INDUCTANCE	CHIPSEN MODEL No.:	
CUSTOMER P/N		ISSUE DATE:	2022/10/30
CUSTOMER REV:		CHIPSENREV:	A0

二, 各系列产品尺寸与电性参数  
 Dimensions and electrical parameters of each product series products

● SHAPES AND DIMENSIONS 外形尺寸 (Unit:mm)

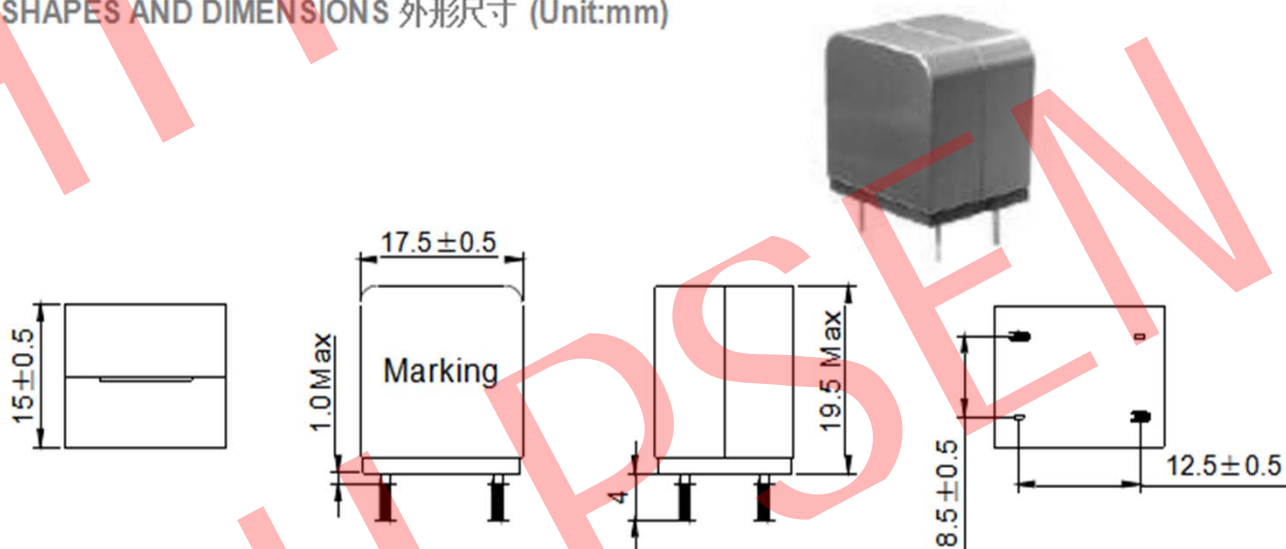

● Electrical parameters

No 序号	PART NUMBER 品名	INDUCTANCE ( $\mu$ H) 电感值 @	DCR (Max) $\Omega$ 直流电阻	(m)	Isat (Max.) (A) 饱和电流	Irms (Max.) (A) 额定电流
1	CHDP1715F-10uH-M	10±20%	8.5		30.0	17.0
2	CHDP1715F-12uH-M	12±20%	8.5		26.0	17.0
3	CHDP1715F-15uH-M	15±20%	8.5		21.0	17.0
4	CHDP1715F-18uH-M	18±20%	8.5		17.0	17.0
5	CHDP1715F-22uH-M	22±20%	8.5		13.5	17.0
6	CHDP1715F-33uH-M	33±20%	8.5		8.0	17.0

NOTE 1. Isat: DC current at which the inductance drops approximate 30% from its value without current;  
 2. Irms: DC current that causes the temperature rise ( $\Delta T = 40^\circ C$ ) from  $25^\circ C$  ambient.

APPROVED BY 批准	CHECKED BY 审核	DRAWN BY 制作
Xie Jingcheng	Chun MingFai	Liu Lijun




SPECIFICATION FOR APPROVAL

CUSTOMER No. :		CHIPSEN P/N:	3D数字电感系列
NAME MODEL:	3D DIGITAL INDUCTANCE	CHIPSEN MODEL No.:	
CUSTOMER P/N		ISSUE DATE:	2022/10/30
CUSTOMER REV:		CHIPSENREV:	A0

二, 各系列产品尺寸与电性参数  
 Dimensions and electrical parameters of each product series products

● SHAPES AND DIMENSIONS 外形尺寸 (Unit:mm)

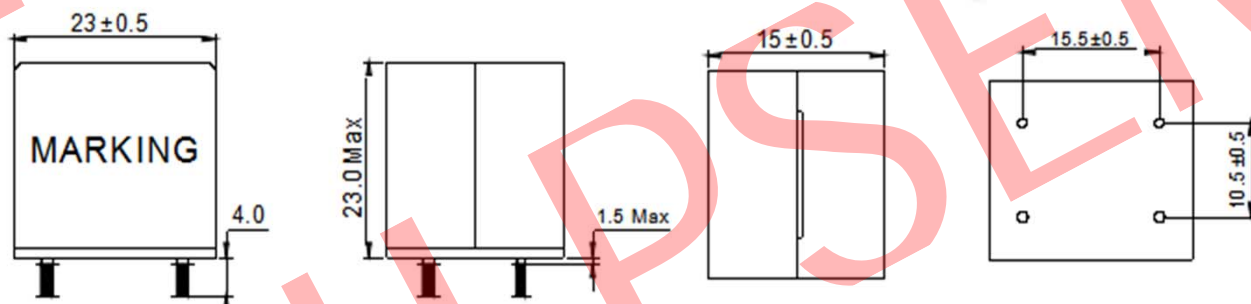

● Electrical parameters

No 序号	PART NUMBER 品名	INDUCTANCE ( $\mu$ H) 电感值 @	DCR (Max) $\Omega$ 直流电阻	(m)	Isat (Max.) (A) 饱和电流	Irms (Max.) (A) 额定电流
1	CHDP2320-10uH-M	10±20%	9.6		43.0	14.0
2	CHDP2320-12uH-M	12±20%	9.6		36.0	14.0
3	CHDP2320-15uH-M	15±20%	9.6		31.0	14.0
4	CHDP2320-18uH-M	18±20%	9.6		26.0	14.0
5	CHDP2320-22uH-M	22±20%	9.6		22.0	14.0
6	CHDP2320-33uH-M	33±20%	9.6		12.0	14.0

NOTE 1.Isat: DC current at which the inductance drops approximate 30% from its value without current;  
 2.Irms: DC current that causes the temperature rise ( $\Delta T = 40^\circ C$ ) from  $25^\circ C$  ambient.

APPROVED BY 批准	CHECKED BY 审核	DRAWN BY 制作
Xie Jingcheng	Chun MingFai	Liu Lijun



晶森电子科技(香港)有限公司  
东莞市健阳达电子有限公司  
DONGGUAN CHIPSEN ELECTRONICS TECHNOLOGY CO.,LTD





SPECIFICATION FOR APPROVAL

CUSTOMER No. :		CHIPSEN P/N:	3D数字电感系列
NAME MODEL:	3D DIGITAL INDUCTANCE	CHIPSEN MODEL No.:	
CUSTOMER P/N		ISSUE DATE:	2022/10/30
CUSTOMER REV:		CHIPSENREV:	A0

三, 包装 Packaging

包装说明及示意图 Packing instructions and schematic diagram

1. Bulk 散装/ Dimension of Bag:160mm\*170mm

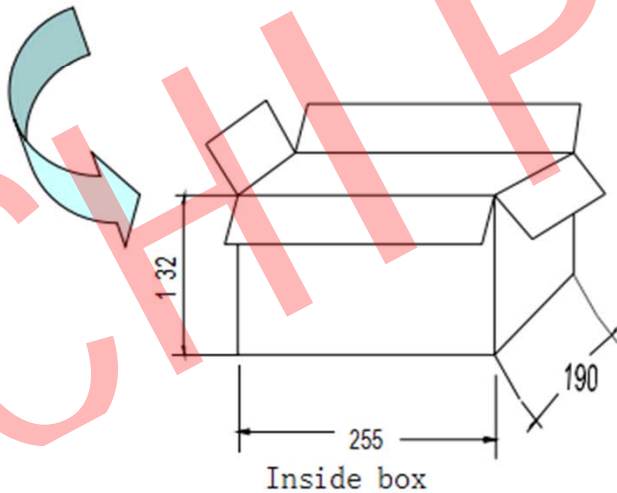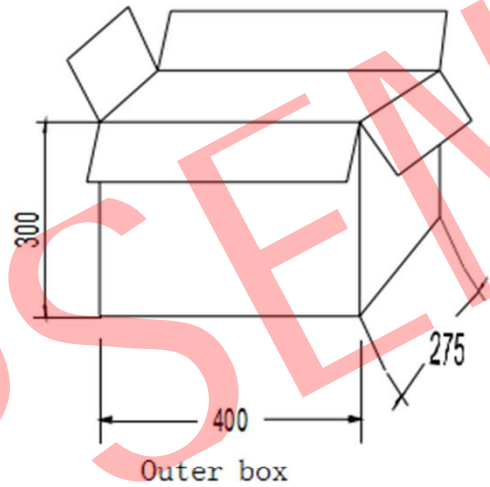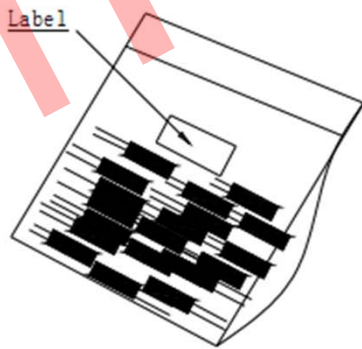

可根据用户需求包装 Packaging according to customer's requirement.

APPROVED BY 批准	CHECKED BY 审核	DRAWN BY 制作
Xie Jingcheng	Chun MingFai	Liu Lijun

Welcome Visit 欢迎访问: <http://www.chipsen.com.cn>







SPECIFICATION FOR APPROVAL

CUSTOMER No. :		CHIPSEN P/N:	3D数字电感系列
NAME MODEL:	3D DIGITAL INDUCTANCE	CHIPSEN MODEL No.:	
CUSTOMER P/N		ISSUE DATE:	2022/10/30
CUSTOMER REV:		CHIPSENREV:	A0

五, 可靠性和测试条件

EC SERIES RELIABILITY AND TEST CONDITIONS

序号 No.	项目 Items	要求 Requirements	试验方法及备注 Test Methods and Remarks
1	工作温度范围 Operating Temperature Range	-40℃~+85℃	包括自身发热的上升温度 Including self-heating temperature rise.
2	绝缘电阻 Insulation Resistance	≥100MΩ	在电感器线圈和磁芯之间施加 (100±15)V 直流电压保持(60±2) s。 (100±15) V DC between inductor coil and core for (60±2) seconds.
3	可焊性 Solderability	电极面 90%以上覆盖新的焊料。 90% or more of electrode area shall be coated by new solder.	在 (245±5) °C 熔融的焊锡 (96.5Sn/3.0Ag/0.5Cu) 中浸(5±1) s。 Dip pads in flux and dip in solder pot (96.5Sn/3.0Ag/0.5Cu) at (245±5) °C for (5±1) seconds.
4	耐焊接热 Resistance to Soldering Heat	外观无可见机械损伤; 电感量变化率: ±10%以内。 No visible mechanical damage. Inductance change: Within ±10%	在 (260±5) °C 熔融的焊锡 (96.5Sn/3.0Ag/0.5Cu) 中浸(10±1) s。 Dip pads in flux and dip in solder pot (96.5Sn/3.0Ag/0.5Cu) at (260±5) °C for (10±1) seconds.
5	端子强度 Adhesion of terminal electrode	元件的端子与本体结合无松动、无脱落。 Strong bond between the pad and the core, without come off PC board.	将电感器用(260±5) °C, (20±5) s 焊在带有 0.3 mm 厚锡膏的基板上, 然后用治具 垂直电极面方向加压 10 N, (10±1) s。 Inductors shall be subjected to (260±5)°C for (20±5) s Soldering in the base whit 0.3mm solder. And then aplomb electrode way plus tax 10 N for (10±1) seconds.
6	温度特性 Temperature characteristic	电感量变化率 $P_{c-b}, P_{c-d}$ 不超过 ±20%。 Inductance change $P_{c-b}, P_{c-d}$ Within ±20%	a: +20 °C (30~45) min → b: -40 °C (30~45) min → c: +20 °C (30~45) min → d: +85 °C (30~45) min → e: +20 °C (30~45) min $P_{c-b} = \frac{L_b - L_c}{L_c} \cdot 100\%$ ; $P_{c-d} = \frac{L_d - L_c}{L_c} \cdot 100\%$
7	恒定湿热 Static Humidity	外观无可见机械损伤; 电感量变化 率: ±10%以内。 No visible mechanical damage. Inductance change: Within ±10%	将电感器放置在于湿度(93±3)%RH, 温 度(40±2) °C 的环境中存放(96±2) h, 在 室温下放置 2 小时后、48 小时内测试。 Inductors shall be subjected to (93±3)%RH . at (40±2)°C for (96±2) h . Placed at room temperature for 2 hours, within 48 hours of testing.

APPROVED BY 批准	CHECKED BY 审核	DRAWN BY 制作
Xie Jingcheng	Chun MingFai	Liu Lijun



**晶森电子科技(香港)有限公司**  
**东莞市健阳达电子有限公司**  
**DONGGUAN CHIPSEN ELECTRONICS TECHNOLOGY CO.,LTD**

**SPECICATION FOR APPROVAL**

CUSTOMER No.:		CHIPSEN P/N:	3D数字电感系列
NAME MODEL:	3D DIGITAL INDUCTANCE	CHIPSEN MODEL No.:	
CUSTOMER P/N		ISSUE DATE:	2022/10/30
CUSTOMER REV:		CHIPSENREV:	A0

**五, 可靠性和测试条件**

**EC SERIES RELIABILITY AND TEST CONDITONS**

序号 No.	项目 Items	要求 Requirements	试验方法及备注 Test Methods and Remarks
8	气候顺序 Climate order	外观无可见机械损伤; 电感量变化率: $\pm 10\%$ 以内。 No visible mechanical damage. Inductance change: Within $\pm 10\%$	1. 高温: GB/T 2423.2-2008 试验方法 Bb, 温度 $(+125 \pm 2)^\circ\text{C}$ , 时间 $(96 \pm 2)\text{h}$ ; 2. 交变湿热-第一个循环: GB/T 2423.4-2008 试验方法 Db: 温度 $+25^\circ\text{C} \rightarrow +55^\circ\text{C}$ , 循环 1 次, 按 24 小时循环; 3. 低温: GB/T 2423.1-2008, 低温试验方法 Ab, $(-40^\circ\text{C} \pm 2)^\circ\text{C}$ , 时间 $(96 \pm 2)\text{h}$ ; 4. 交变湿热 -其余的循环 GB/T 2423.4-2008 试验方法 Db: 温度 $+25^\circ\text{C} \rightarrow +55^\circ\text{C}$ , 循环 1 次, 按 24 小时循环; 在室温下放置 2 小时后、48 小时内测试。 1. High temperature: According to GB / T 2423.2-2008 Standard Test Method Bb, temperature is $(+125 \pm 2)^\circ\text{C}$ and keep $(96 \pm 2)$ hours. 2. Alternating hot and humid (The first cycle): According to GB / T 2423.4-2008 Standard Test Method Db, the temperature cycle shall be placed at $+25^\circ\text{C}$ and $+55^\circ\text{C}$ for 24h. 3. Low temperature: According to GB / T 2423.1-2008 Standard Test Method Ab, temperature is $(-40 \pm 2)^\circ\text{C}$ and keep $(96 \pm 2)$ hours. 4. Alternating hot and humid (Other cycles): According to GB / T 2423.4-2008 Standard Test Method Db, the temperature cycle shall be placed at $+25^\circ\text{C}$ and $+55^\circ\text{C}$ for 24h. Placed at room temperature for 2 hours, within 48 hours of testing.
9	温度变化 Thermal shock	外观无可见机械损伤; 电感量变化率: $\pm 10\%$ 以内。 No visible mechanical damage. Inductance change: Within $\pm 10\%$	$(-40 \pm 3)^\circ\text{C}$ , 时间 $(30 \pm 3)\text{min} \leftrightarrow (85 \pm 2)^\circ\text{C} / (30 \pm 3)\text{min}$ , 转换时间 $(2 \sim 3)\text{min}$ , 循环 5 次; 在室温下放置 2 小时后、48 小时内测试。 The test sample shall be placed at $(-40 \pm 3)^\circ\text{C}$ and $(85 \pm 2)^\circ\text{C}$ for $(30 \pm 3)\text{min}$ , different temperature conversion time is 2~3 minutes. The temperature cycle shall be repeated 5 cycles. Placed at room temperature for 2 hours, within 48 hours of testing.
10	耐久性 (寿命) Life	外观无可见机械损伤; 电感量变化率: $\pm 10\%$ 以内。 No visible mechanical damage. Inductance change: Within $\pm 10\%$	温度 $(85 \pm 2)^\circ\text{C}$ , 时间 $(1000 \pm 24)\text{h}$ , 施加额定电流, 在室温下放置 2 小时后、48 小时内测试。 Inductors shall be store at $(85 \pm 2)^\circ\text{C}$ for $(1000 \pm 24)$ hours with rated current applied. Placed at room temperature for 2 hours, within 48 hours of testing.

<b>APPROVED BY 批准</b>	<b>CHECKED BY 审核</b>	<b>DRAWN BY 制作</b>
	Chun MingFai	Liu Lijun

Welcome Visit 欢迎访问: <http://www.chipsen.com.cn>



SPECIFICATION FOR APPROVAL

CUSTOMER No. :		CHIPSEN P/N:	3D数字电感系列
NAME MODEL:	3D DIGITAL INDUCTANCE	CHIPSEN MODEL No.:	
CUSTOMER P/N		ISSUE DATE:	2022/10/30
CUSTOMER REV:		CHIPSENREV:	A0

六, 注意事项

Matters needing attention

1. 环保情况说明 Environmental Protection Statement

RoHS 指令: 公司产品符合 RoHS 指令。

Response to RoHS directive: Our products are RoHS compliance.

2. 推荐使用的焊接曲线 Recommended soldering profile

本产品建议使用回流焊接法。


Applicable soldering process to the products is reflow soldering.

2.1 焊接材料 Soldering Materials

2.1.1 焊料 Solder: Sn-3.0Ag-0.5Cu

2.1.2 助焊剂: 使用松香基助焊剂, 禁止使用卤化物含量超过 0.2wt% 的强酸性助焊剂和水溶性助焊剂。Flux:  
Use rosin-based flux, but not strongly acidic flux (with chlorine exceeding 0.2 wt%). Do not use water-soluble flux.

2.2 焊接曲线 Soldering Profile

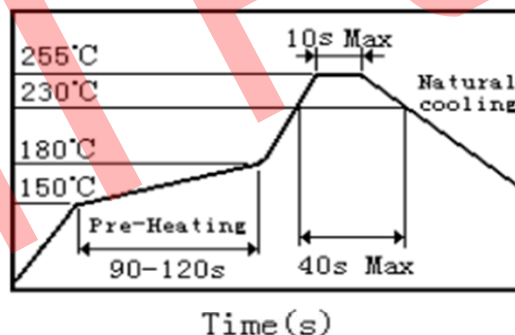

2.3 烙铁焊接 Soldering Iron

使用烙铁进行返修时要求在 150°C 下预热至少 1 分钟, 不能直接用焊头接触磁体, 返修焊接条件如下:  
Reworking with electric soldering iron must preheating at 150°C for 1 minute is required, and do not directly touch the core with the tip of the soldering iron. The reworking soldering conditions are as follows:

2.3.1 烙铁头温度 Temperature of soldering iron tip: 350°C;

2.3.2 烙铁输出功率 Soldering iron power output: ≤30W;

2.3.3 烙铁头直径 Diameter of soldering iron end: ≤1.0mm;

2.3.4 焊接时间 Soldering time: <3 s



APPROVED BY 批准	CHECKED BY 审核	DRAWN BY 制作
Xie Jingcheng	Chun MingFai	Liu Lijun





SPECIFICATION FOR APPROVAL

CUSTOMER No. :		CHIPSEN P/N:	3D数字电感系列
NAME MODEL:	3D DIGITAL INDUCTANCE	CHIPSEN MODEL No.:	
CUSTOMER P/N		ISSUE DATE:	2022/10/30
CUSTOMER REV:		CHIPSENREV:	A0

六, 注意事项

Matters needing attention

3. 清洗 Cleaning

对本产品进行清洗操作前, 需确认以下条件:

The following conditions should be observed when cleaning the products:

- 3.1 清洗温度:  $\leq 60^{\circ}\text{C}$  (酒精清洗剂 $\leq 40^{\circ}\text{C}$ )  
Cleaning Temperature:  $60^{\circ}\text{C}$  max. ( $40^{\circ}\text{C}$  max. for alcohol cleaning agents)
- 3.2 超声波清洗, Ultrasonic:  
输出 Output: 20 W/L max.  
持续时间 Duration: 5 min max.  
频率 Frequency: 28 to 40kHz
- 3.3 清洗时要避免 PCB 板和安装产品的共振。Avoid the resonance between PCB and mounted products when it is cleaning.

4. 贮存方法 Storage Methods

4.1 存储期限 Storage Period

为保证端子电极的焊接特性和包装材料处于良好状态, 请于本公司发货后 6 个月内使用本产品。同时, 由于端子电极的焊接特性会随时间发生变化, 如果贮存时间超过 6 个月, 请首先确认其焊接特性后再安装使用。

To maintain the solderability of terminal electrodes and to keep the packing material in good condition, product should be used within 6 months from the time of delivery. And the solderability of products electrodes may decrease as time passes, so in case of storage over 6 months, solderability shall be checked before actual usage.

4.2 存储条件 Storage Conditions

4.2.1 存放货物的仓库应满足以下条件: Store products in a warehouse in compliance with the following condition:

温度 (Temperature):  $-10 \sim +40^{\circ}\text{C}$  相对湿度 (Humidity): 30~70%RH

4.2.2 不要使产品遭受温度和湿度的快速变化。Do not subject products to rapid changes in temperature and humidity.

APPROVED BY 批准	CHECKED BY 审核	DRAWN BY 制作
Xie Jingcheng	Chun MingFai	Liu Lijun





晶森电子科技(香港)有限公司  
东莞市健阳达电子有限公司  
DONGGUAN CHIPSEN ELECTRONICS TECHNOLOGY CO.,LTD

SPECIFICATION FOR APPROVAL

CUSTOMER No. :		CHIPSEN P/N:	3D数字电感系列
NAME MODEL:	3D DIGITAL INDUCTANCE	CHIPSEN MODEL No.:	
CUSTOMER P/N		ISSUE DATE:	2022/10/30
CUSTOMER REV:		CHIPSENREV:	A0

六, 注意事项

**Matters needing attention**

- 4.2.3 不要将产品存放在化学环境中, 如硫酸气体或碱性气体中, 否则会降低电极端子的焊接特性和使传感器腐蚀。Do not store the products in chemical atmosphere such as one containing sulfurous acid gas or alkaline gas, that will causes poor solderability and corrosion of inductors.
- 4.2.4 不要以散包装的形式存放产品以防止电感器间的相互碰撞造成磁芯破裂或断线。Do not store products in bulk packaging to prevent collision among inductors which causes core chipping and wire breakage.
- 4.2.5 为了避免受潮气、灰尘等物质的影响, 产品应保管于货架上。Store products on pallets to protect from humidity, dust, etc.
- 4.2.6 产品应避免热冲击、振动以及直接光照等等。Avoid heat shock, vibration, direct sunlight, etc.

**5. 使用注意事项 Precautions For Use**

- 5.1 公司产品适用于 AV 设备、OA 设备、家电、信息服务等一般电子设备中。Our products are designed and promoted for use in general electronic devices such as audio-equipment, office automation equipment, household appliance and information service.
- 5.2 当本公司的产品使用在一般电子设备以外的领域时, 对于此所引发的设备失效我司将不承担任何法律责任。In case of using the product for the purpose other than general electronics devices, we shall not be held liable for any dysfunctions in or damage to the equipment with which the product is used.
- 5.3 本承认书只保证我司产品作为一个单体时的质量情况, 当我司产品被安装到贵司产品上时, 请贵司对使用在贵司电路上的产品情况进行了有效评价和确认。Our specification limits the quality of the component as a single unit. Please ensure the component is thoroughly evaluated in your application circuit.
- 5.4 不要对产品施加过大的振动或机械冲击; Do not apply excessive vibration or mechanical shock to products.
- 5.5 为防止断线, 请不要使用锋利的物体接触线圈, 如镊子; Do not touch wire with sharp objects such as tweezers to prevent wire breakage.
- 5.6 在产品贴装时不要使用过大的压力, 避免磁芯断裂。Do not apply excessive stress to products mounted on boards to prevent core breakage.

APPROVED BY 批准

Xie Jingcheng

CHECKED BY 审核

Chun MingFai

DRAWN BY 制作

Liu Lijun

Welcome Visit 欢迎访问: <http://www.chipsen.com.cn>